

DeLonghi

CLIMAVENETA

BRAN

Air Source Heat Pumps



UNIT SUMMARY

BRAN H Unit: AW
Capacity: 6kW-14kW
Power Supply: Single Phase models

A cost effective high specification Air Source solution providing heating and hot water up to 55°C

HIGH EFFICIENCY & PERFORMANCE:

COP 4.01 (401% efficient)


*Average coefficient of performance (COP) for the BRAN H range based on EN14511 conditions i.e. ambient temperature of 7°C and 35°C flow temperature

COP 3.6 (360% efficient @ 2°C ambient & 35°C flow temp)

FEATURES & OPERATIONAL BENEFITS:

- MCS accredited Heat Pumps, certificate HP0005
- Cost effective
- High efficiency
- Full DHW and heating control
- Built in circulation pump
- High COP
- 55°C output temperature (50°C at -3°C ambient)
- Full floating control for high efficiency & minimum defrost time to -15°C ambients

Available Models



Bran H

Air Source Heat Pumps

Heat energy is collected from the external ambient air using the Heat Pumps integral evaporator coil. This energy is then transferred as high grade heat into the building.

Unit Description

The DeLonghi Prana BRAN H range of Air Source Heat Pumps provide a high level of performance along with a high level of specification but in a very cost effective package.

- The nominal refrigeration COP* (efficiency) of these units is very high averaging over 4.0 but importantly the performance of these units when operating in lower ambient temperatures is also at a very high level. Designed to operate in ambient temperatures as low as -15°C the BRAN H range is more than capable of operating with high efficiency in UK & Irish winter temperatures.
- These units incorporate a built in heating system circulation pump, control for hot water production including Y Plan valve operation along with full weather compensation and sophisticated controls which give a very short defrost cycle of approximately 6 minutes in lower ambient temperatures.
- A modulating source fan controls efficiency and maximises the performance on part loads by drawing the correct amount of air through the unit to match the load requirement of the property at any time, so reduces running costs and also allows the units to function with any Heat Pump optimised thermal store or cylinder.
- This advanced control means that these units are able to operate with very low system volumes, a minimum open circuit volume of 3.5 litres per nominal kW of Heat Pump capacity is required which can remove the need for buffer tanks and secondary pumps hence reducing installation costs considerably.
- These DeLonghi-Climaveneta units are high specification Heat Pumps which are built to exacting standards with regard to efficiency and functionality. All the units are European manufactured and benefit from the DeLonghi-Climaveneta approach to product development and quality management providing the complete package that would be expected from a premier manufacturer.
- Microgeneration scheme accreditation allows access to grant funding and also guarantees performance and manufacturing quality



Certificate Number MCS HP0005 Heat Pumps

*COP is shown without circulation pump input power. Please note that unlike most other Heat Pumps these units incorporate built in circulation pumps, therefore by not including the circulation pump input power we are able to provide a direct performance comparison with other units).



heatpump

TECHNOLOGY

The Heat Pump Specialists

DeLonghi

CLIMAVENETA

Main Components

- Condensate drain pan kit.
- Condensing coil protection grills
- Housing and base are made from hot-galvanized epoxy powder coated sheet metal
- High efficiency and low pressure drop stainless steel (AISI 316) water exchangers, with anti-freeze heating element and differential pressure switch
- Hermetic scroll type compressors, equipped with the crankcase heater and thermal protection
- Condensers finned tubes with copper and aluminium fins high exchange surface (100% fully quality tested); sub cooling circuit to prevent freezing at the base.
- Axial electric fans, external rotor, electric motor with a 6-pole fitted with thermal protection, housed in an aerodynamic profile with safety grill
- Low external air temperature device:
 - fan speed regulation with pressure switch which maximises efficiency at part load
- Electrical modulating frost protection heating within the base which minimizes the risk of condensate freezing during periods of low ambient temperature
- The electronic controller menu allows management of:
 - circulation pump on the system side
 - domestic hot water production via control of the external three-way valve (not supplied)
 - 24 hour timer operation for a cylinder heater
 - control of the incorporated supplementary heating element
 - outdoor temperature sensor for modulating set point weather compensation
- Soft start for 230V/1/50Hz units (45 amps & 25 amps for the 0011 model)
- Phase sequence control relay
- The water circuit comes complete with:
 - variable flow circulation pump for all models
 - differential pressure switch on plant side
 - expansion vessel (Heat Pump circuit only)
 - safety valve
 - manual filling assembly- pressure gauge- manual air vent valve


NB: Optional equipment includes a range of tanks & cylinders plus standard installation packs, see current price list or contact ICS HPT or your distributor for details.



Modulating Fan

Smart full floating electronic control monitors the main components to improve performance and maximise efficiency. There is a pressure transducer located in the external heat collection coil to modulate the fans' supply voltage, which enables:

- Performance to be improved under standard and extreme conditions
- Quieter running when operating on partial load
- Maximum compressor efficiency with optimised performance

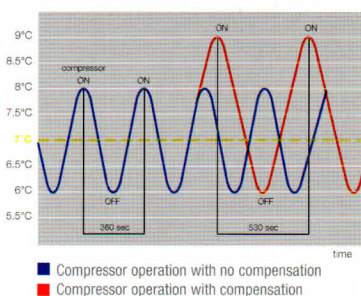

Floating Setpoint

An algorithm optimises the setpoint of the output water automatically every 3 minutes based on the compressor operating time and the temperature of the water in the system. Water storage is no longer essential as it is compensated by the floating set feature, resulting in:

- Minimised size
- Minimised weight
- An open system volume of only 3.5L per kW is required to maintain efficient performance
- Minimum system response time when operating on varying load conditions

Bran H			0011	0025	0041
Heating capacity	(1)	kW	6.5	8.7	13.8
Total power input (compressors & fans)	(1)	kW	1.65	2.15	3.45
COP*	(1)		3.94	4.05	4.06
Heating capacity	(2)	kW	5.6	7.7	12.2
Total power input (compressors & fans)	(2)	kW	1.55	2.15	3.40
COP*	(2)		3.61	3.58	3.59
Maximum output temperature at nominal conditions		°C	55	55	55
Rated water flow		m ³ /h	1.12	1.50	2.37
Residual head		kPa	41	48	89
Fans		n°	1	1	2
Air flow		m ³ /s	0.9	1	1.9
Type of compressor			Scroll		
No. of compressors	n°		1	1	1
No. of circuits	n°		1	1	1
Refrigerant R410A	kg		1.75	3	3
Oil Mobil EAL ARTIC 22cc	kg		1.1	1.24	1.95
Pump type			circulator		
No. of pumps	n°		1	1	1
Hydraulic connections	inches		3/4	3/4	1 1/4
Sound pressure (3)	dB(A)		58	59	59
Electric power supply	V/ph/Hz		230-50		
Starting current (all single phase models have a maximum 45A soft start fitted as standard)**	A)		25	39	45

**the 0011 model has a 25A soft start fitted.

Circulation pump				Included	
DHW control				Included	
Height/Length/Width	mm	640/900/370	940/900/370	1240/900/370	
Weight	kg	105	130	160	

Note

- (1) Heating mode: external air temperature 7°C DB/6°C WB, water in flow at 30°C and outlet at 35°C
 - (2) Heating mode: external air temperature 2°C DB/1°C WB, water in flow at 30°C and outlet at 35°C
 - (3) Noise level measured in free field at a distance of 1 metre directly from the fan
- * According to the Eurovent standard without circulation pump input power.



Certificate Number MCS HP0005
Heat Pumps



Call us now on: **08452 417 617**
or email enquiries@icsheatpumps.co.uk www.icsheatpumps.co.uk

3A Trident Business Park, Amy Johnson Way, Blackpool, FY4 2RP Telephone: 01253 685100 Fax: 01253 685101